

Revised Record



1.0

New issue

2016-04-27

INTERFACE

J4		J5		J2	J3	J1	
1	VSS	1	/RES	1	D0	1	VSS
2	VDD(5V)	2	/RD	2	D1	2	VDD(5V)
3	V0	3	/WR	3	D2	3	V0
4	A0	4	/CS	4	D3	4	/WR
5	/WR	5	A0	5	DISP	5	/RD
6	/RD	6	DB0	6	FLM	6	/CS
7	DB0	7	DB1	7	M	7	A0
8	DB1	8	DB2	8	LP	8	/RES
9	DB2	9	DB3	9	CP	9	DB0
10	DB3	10	DB4	10	VDD	10	DB1
11	DB4	11	DB5	11	VSS	11	DB2
12	DB5	12	DB6	12	VOUT	12	DB3
13	DB6	13	DB7	13	V0	13	DB4
14	DB7	14	VDD(5V)	14	FG	14	DB5
15	/CS	15	VSS	15	LEDA	15	DB6
16	/RES	16	VOUT	16	LEDK	16	DB7
17	VOUT	17	V0			17	LEDA
18	FG	18	DCLK(XL)			18	VEE
19	LEDA	19	DOUT(XR)			19	LEDA
20	LEDK	20	DIN(YU)			20	LEDK
		21	T-CS(YD)				
		22	PEN				
		23	LEDA(NC)				
		24	LEDK(NC)				

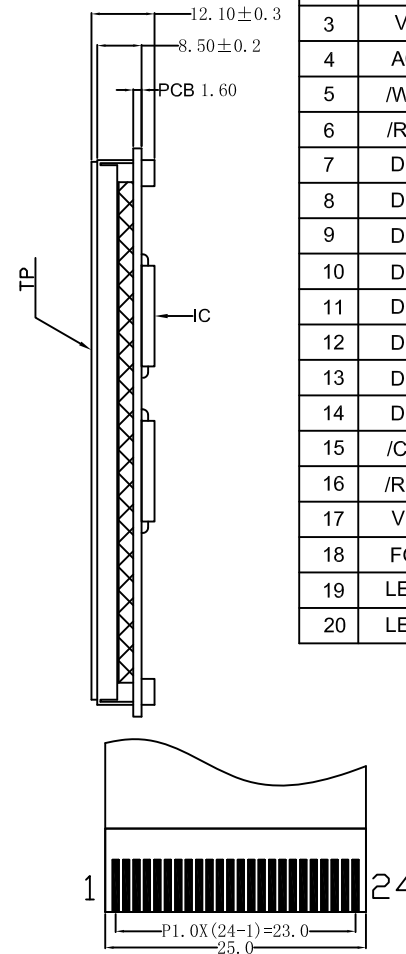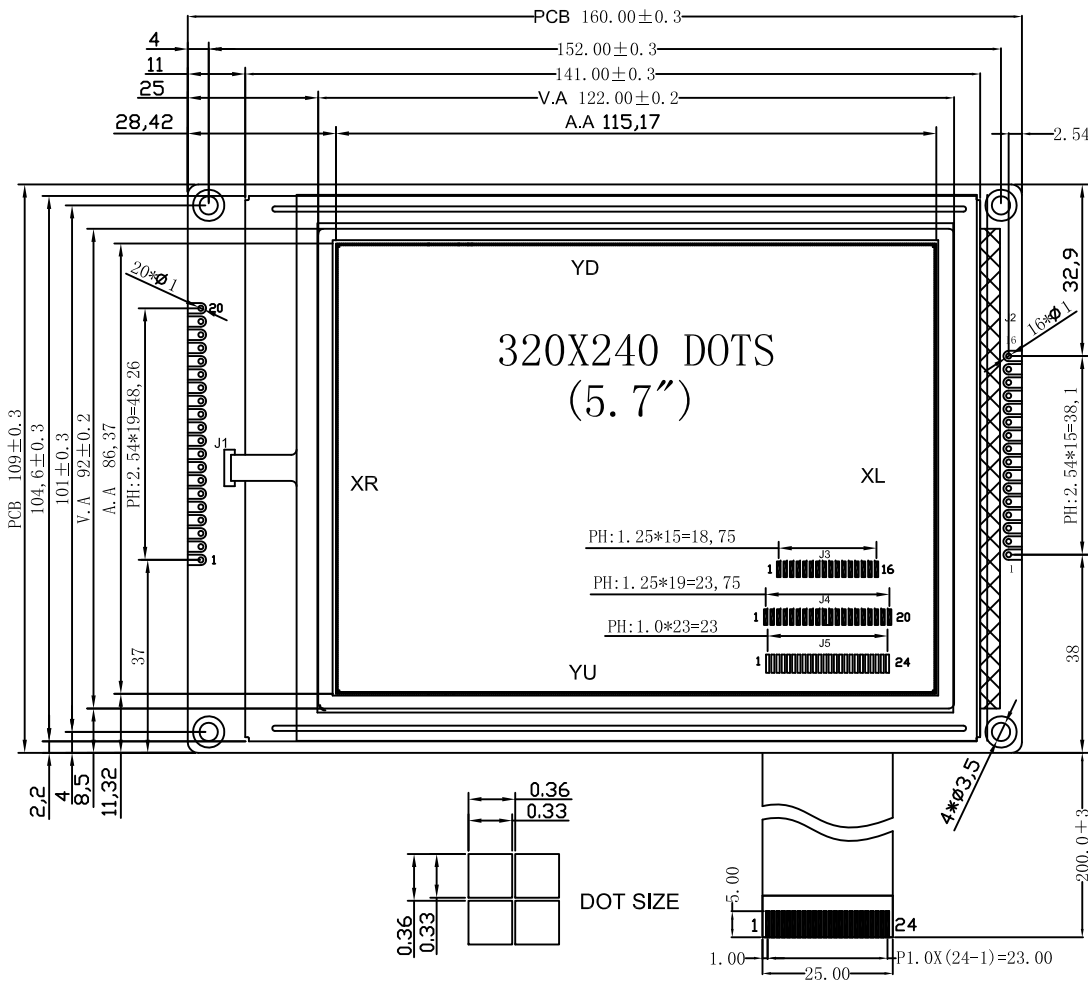

Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Backlight:	
Other:	

NOTES:

- | | |
|----------------------------|--------------------------------------|
| 01. DISPLAY TYPE: | FSTN-B&W/POSITIVE/TRANSFLECTIVE RoHS |
| 02. OPERATING VOLTAGE: | VOP=23V,VDD=5.0V |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C |
| 04. STORAGE TEMPERATURE: | -30°C~+80°C |
| 05. DRIVE MODE: | 1/240DUTY,1/17BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | RA8835P3N(OR-EQV) |
| 08. CONNECTOR: | ZEBER |
| 09. BACKLIGHT: | LED(WHITE,I=300MA) |
| 10. CUSTOMER'S PART ID: | BLAZE_STANDARD_PRODUCT |

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-24	BCB320240-06A-SERIES	VERSION: 1.0
CHECKED BY: BDT-06		PAGE 1 OF 1
APPROVED BY: BDT-02		UNIT: mm
Website:http://www.blazedisplay.com		DATE: 2016-04-27